

Special Inserts for water meters & tails

PRODUCT DATA – Standard specifications

Document Under Construction


Available flow rates litres/minute

.4 / .45 / .5 / .55 / .63 / .7 / .8 / .9 / 1.0 / 1.1 / 1.2 / 1.3 / 1.5 / 1.6 / 1.8 / 2.0 / 2.3 / 2.5 / 2.8 / 3.2 / 3.5 / 4.0 / 4.5 / 5.0 / 5.5 / 6.3 / 7.0 / 8.0 / 9.0 / 10 / 11 / 12 / 13 / 15 / 16 / 18 / 20 / 23 / 25 / 28 / 32 / 36 / 41 / 45 / 49 / 54 / 59 / 66 / 73 / 82 / 91 / 102 / 114 / 125 / 138 / 150 / 162 / 180 / 199 / 216 / 233 /

Pressure Differential Range 140 – 1000 KPA } = Standard PRECISION Performance
Flow Rate Accuracy + / - 10%

Temperature Range

Performance Graph Typical of all PRECISION valves irrespective of body size or flow rate

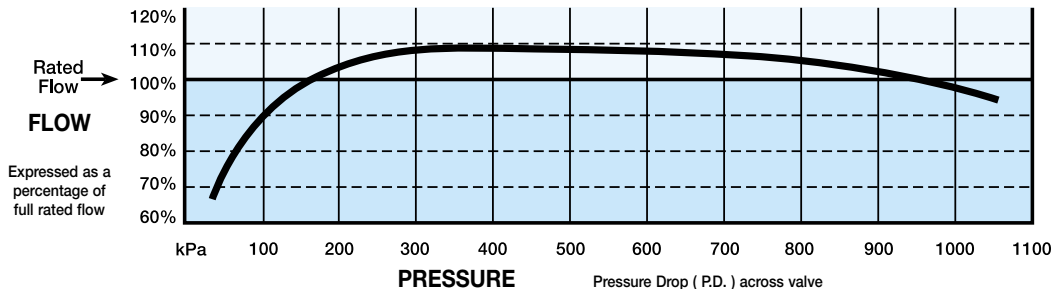

Materials	Body	Brass	“DR” Brass to AS1567 - 352
		PVC	Grey UPVC, Special grade to suit potable water requirements to AS4020
	Control rubber		Nitrile butadiene, potable water approved to AS4020
	O’Rings		Nitrile, potable water approved to AS4020

www.maric.com.au

Telephone:

08 8431 2281

(Int’l 61 8 8431 2281)

Facsimile:

08 8431 2025

Insert Dimensions

Non-Standard Specifications - Higher flow rates, Kwyflo (quiet) valves, EPDM or Viton control rubbers, Higher or lower pressure ranges, or higher temperature ranges may be available in certain valve configurations. Refer to Non-Standard Specification Availability data for options.

